

MODELS FOR UNIQUE APPLICATIONS - 7201 SERIES


- Attacks brush with ease.
- Close cut to fell trees up to 6" with high flow.
- Cuts vegetation before the frame pushes the material over.
- Same Brush Wolf quality, performance and value.



Model 7201 Open Front



Model 7201 Blade Carrier Assembly

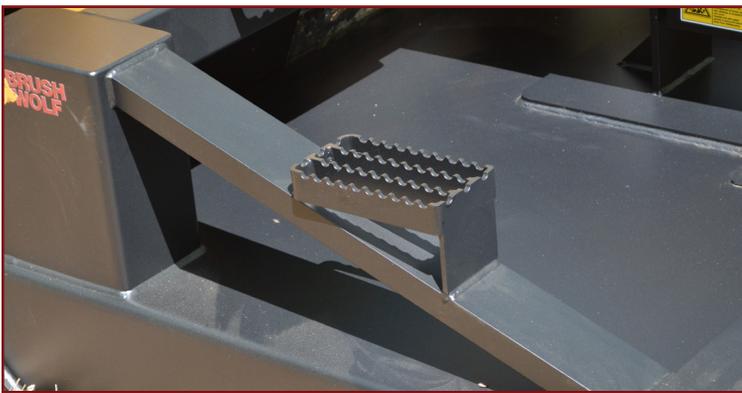

Step plate for easy entry into skid steer



Model 7201 Clearing Brush

SPECIFICATIONS	7201 Low Flow	7201 Standard	7201 High Flow*
Cutting Width:	72.000	72.00	72.000
Overall Width:	73.750	73.750	73.750
Overall Length:	84.250	84.250	84.250
Blade Carrier Type:	1.000 Bar Welded to .313 Spun Formed High Strength Steel		
Blades:	(2) .500 x 4.000 (High Strength)		
Blade Rotation:	Counter Clockwise		
Drive Protection:	GRD-2 Bolt (Shear Bolt)		
Motor/Gearbox Coupler:	Machined Steel		
Motor Protection:	Pressure Reliefs	Pressure Reliefs, Case Drain	
Deck Thickness:	.250 One Piece of Formed Steel		
Hydraulic Hose with Protective Wrap**:	78.000		
Flat Face Coupling*:	STANDARD		
Gearbox Seal Guard:			
Cutting Capacity Max.:	3"	4"	6"
Required GPM:	15 - 20	21 - 25	26 - 40
PSI MIN/MAX:	3000/3500	3000/3500	3100/4100
Weight of Cutter:	1,186 lbs.	1,236	1,236 lbs.

*All high flow models include a case drain to relieve excess pressure build-up and protect hydraulic motor life. **Custom sizes and lengths available upon request.
Safety information: always operate skid steer according to manufacturers recommendation. Operator of skid steer should be behind shatter-proof glass.